



CD

CV12/0B-00A

Connect.M12-M-Axial,4 p,Field attach.

TECHNICAL FEATURES

Application

Fixing	screw terminals
--------	-----------------

Electrical data

Rated current	4 A
---------------	-----

Led	no
-----	----

Wires	4
-------	---

Insulation resistance	$\geq 100 \text{ M}\Omega$
-----------------------	----------------------------

Contact resistance	$\leq 5 \text{ m}\Omega$
--------------------	--------------------------

Rated voltage	250 V
---------------	-------

Mechanical data

Connections	Field attachable
-------------	------------------

Operating temperature	-25 °C ... 90 °C
-----------------------	------------------

Head type	Axial
-----------	-------

Plug	M12
Outer diameter	3 mm ... 6,5 mm
Stripping lenght of the sheath	20 mm
Conductors section	Max. 0,75 mm²
Model	Male

Test/Approvals


Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-25 °C ... 90 °C
Mechanical Protection	IP67

OTHERS

Dimensions

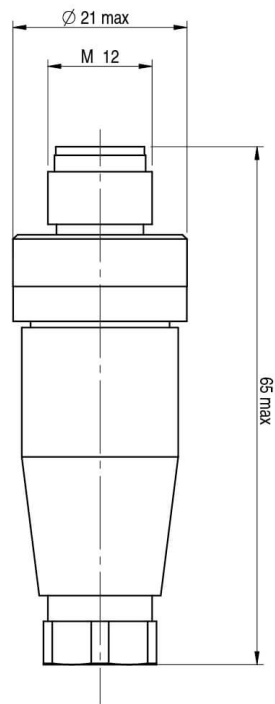

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
03:14:44