



UT

UT2F/G6-0ESYIO

Ultra.M30,PNP+4-20mA,M12 plug,Diffuse

**M30 CYLINDRICAL DIRECT DIFFUSE &
RETRO-REFLECTIVE ULTRASONIC SENSOR WITH
TEACH-IN BUTTON**

OVERVIEW

- M30 ultrasonic sensor with standard housing and with large front with high performances and high sensing distances
- Adjustable hysteresis function: models with double digital programmable output specific for level detection
- Models with voltage or current output: programmable slope to optimize resolution
- Adjustable working area (window mode or object mode) by Teach-in button on all models for a quick and easy installation
- Two multifunction LEDs: orange LED for adjustment procedure and output type and green LED for target alignment
- Plastic and AISI 316L stainless steel housing, plug M12 or cable exit 4 pin

TECHNICAL FEATURES

Detection properties

Nominal sensing distance

Thermal drift of Sr

Repeat Accuracy

Beam angle

Resolution

Sensitivity adjustment	Teach-in button
Hysteresis	
thermal compensation	
Minimum sensing distance (blind zone)	
Linearity error	

Application

Function Principle	Diffuse reflection
--------------------	--------------------

Outputs

Output type	IO-Link/PNP + 4...20mA
Output Function	NO/NC + positive/negative slope
Switching frequency	
Response time	

Electrical data

Operating Voltage	
No-Load supply current	
Load current	
Leakage current	
Output voltage drop	

Max ripple content
LED indicators
Time delay before availability
Short-circuit protection
Reverse Polarity Protection
Impulsive Overvoltage Protection

Mechanical data	
Dimensions	
Housing material	
Weight	
Connections	M12 Plug
Tightening torque	
Operating temperature	
Storage temperature	
Transducer Frequency	
Diameter/Dimension	M30

Test/Approvals
Approvals



EMC compatibility
Shocks and vibrations
Degree of protection

Accessories
Supplied Accessories

Generical Data
Dimensions
Operating Temperature
Mechanical Protection

OTHERS

Dimensions

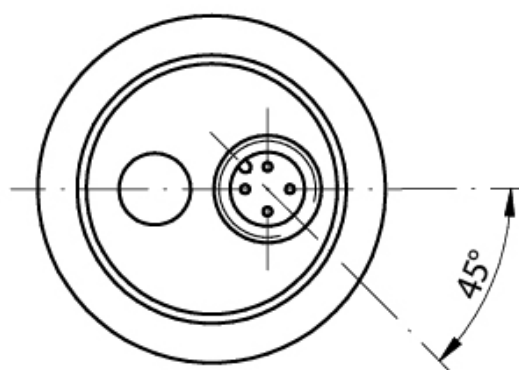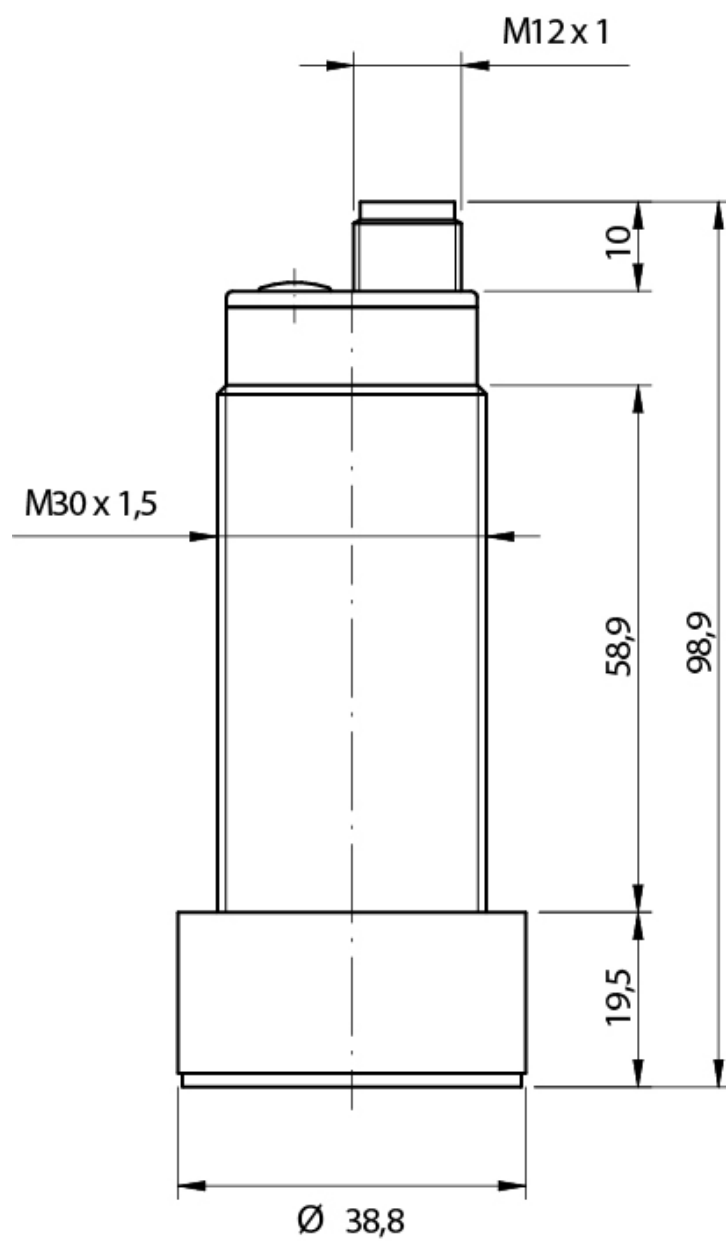

S.r.l.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail

info@datasensing.com

printing

10/08/2026

08:21:54