



UQ

UQ1D/G4-0E

**Ultra.Hybrid,NPN+4-20mA,M12
plug,Diffuse**
CUBIC ULTRASONIC SENSOR WITH M18 HEAD

OVERVIEW



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	1200mm
--------------------------	--------

Thermal drift of Sr	±5%
---------------------	-----

Resolution	3mm
------------	-----

Sensitivity adjustment	Teach-in button
------------------------	-----------------

Hysteresis	1%
------------	----

thermal compensation	Yes
----------------------	-----

Minimum sensing distance (blind zone)	80mm
---------------------------------------	------

Linearity error	1%
Effective Aperture Angle	8° ± 2°
Application	
Function Principle	Diffuse reflection
Outputs	
Output type	NPN + 4...20mA
Output Function	NO/NC + positive/negative slope
Switching frequency	3Hz
Response time	400ms
Electrical data	
Operating Voltage	10 - 30Vdc
No-Load supply current	≤35mA
Load current	100mA
Leakage current	10µA @ 30Vcc
Output voltage drop	2,2Vmax. @ IL=100 mA
Max ripple content	5%
LED indicators	verde: echo - giallo: uscita
Short-circuit protection	si

Reverse Polarity Protection	si
Impulsive Overvoltage Protection	si

Mechanical data

Dimensions	53x38x20mm
Material	PBT
Connections	M12 Plug
Tightening torque	1Nm
Operating temperature	- 20°C...+ 70°C
Storage temperature	- 35°C...+ 80° C senza ghiaccio
Transducer Frequency	200kHz
Diameter/Dimension	Cubic

Test/Approvals

Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	IEC EN60947-5-2 / 7.4
Degree of protection	IP67

Accessories


Supplied Accessories	1 M18x1 nut
----------------------	-------------

Generical Data


Dimensions	53x38x20mm
Operating Temperature	- 20°C...+ 70°C
Mechanical Protection	IP67

CONNECTIONS

Eletrical diagram

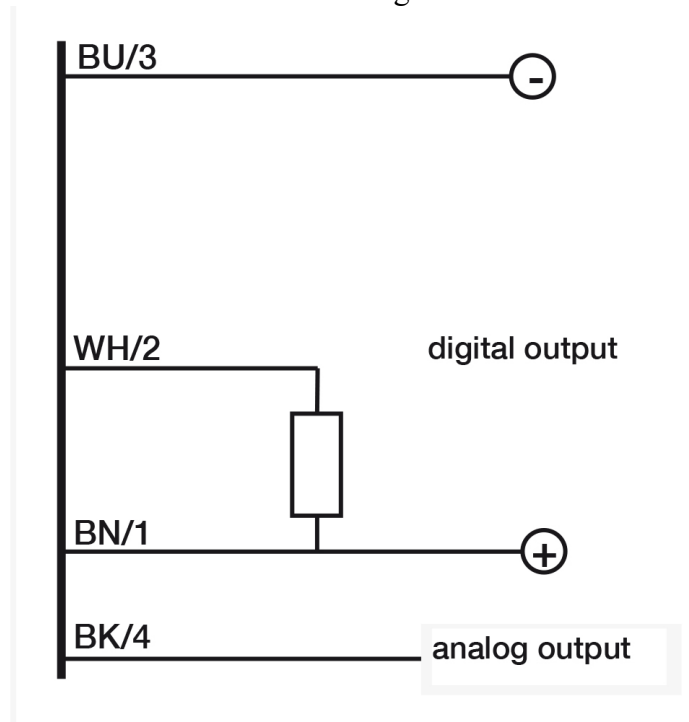


Connector

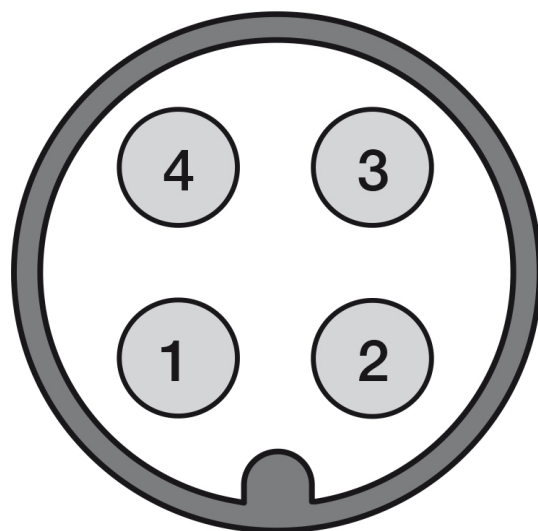


OTHERS

Dimensions

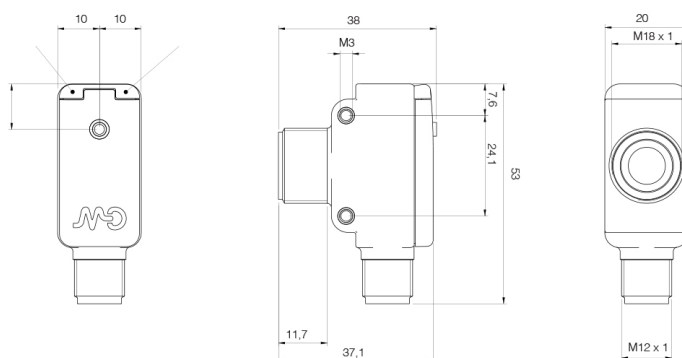

Response curves

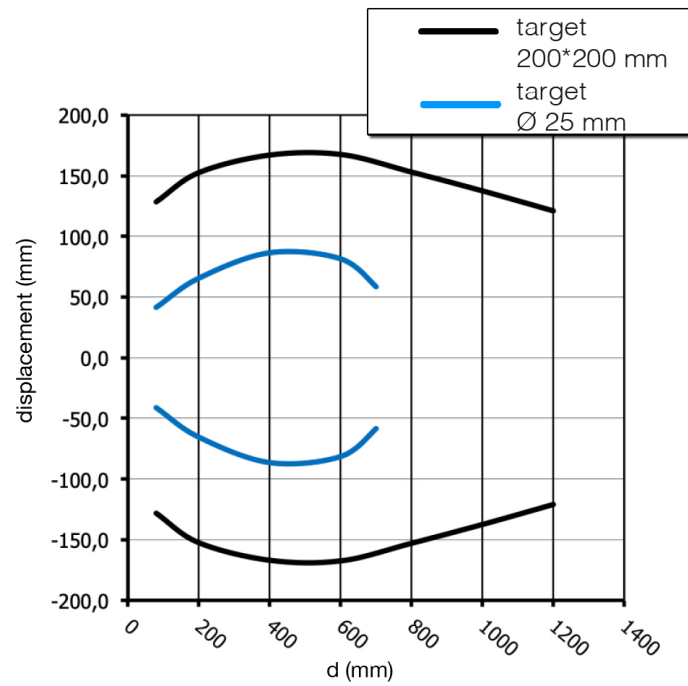

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

date of printing

11/08/2026
02:09:43