


# AMT58

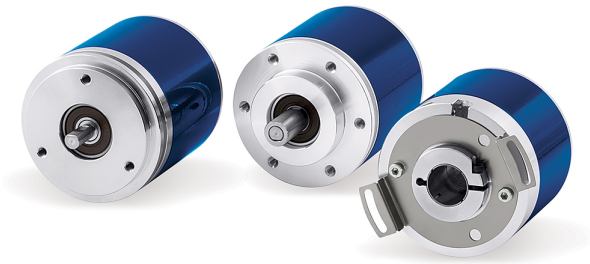

95B081770

CN-M12-4P-5M-EC/PN-RJ  
SSI® MULTI-TURN LINE

## OVERVIEW

## TECHNICAL FEATURES

### Detection properties

|                          |     |
|--------------------------|-----|
| Nominal sensing distance | n/a |
|--------------------------|-----|

|                        |     |
|------------------------|-----|
| Sensitivity adjustment | n/a |
|------------------------|-----|

### Application

|             |               |
|-------------|---------------|
| Description | Straight male |
|-------------|---------------|

|           |                                                   |
|-----------|---------------------------------------------------|
| Functions | Connector/cable for Ethercat/Profinet programming |
|-----------|---------------------------------------------------|

### Outputs

|             |     |
|-------------|-----|
| Output type | n/a |
|-------------|-----|

|               |     |
|---------------|-----|
| Response time | n/a |
|---------------|-----|

#### Electrical data

Operating Voltage

n/a

Emission

n/a

#### Mechanical data

Dimensions

L=5m

Material

Plastic - PVC

Connections

M12 / RJ

#### Generical Data

Dimensions

L=5m

### **Datasensing S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail  
info@datasensing.com

**date of  
printing**  
10/08/2026  
00:17:47