



CX2

CX2E0RB/10-064V

Area Sen, H=640mm-10mm
pitch,E+R,NPN+PNP

AREA SENSORS WITH HIGH RESOLUTION AND COMPACT
HOUSING WITH DIGITAL AND ANALOGUE OUTPUT

OVERVIEW

- Parallel beams and floating crossbeams with variable amplitude
- Synchronization by cable. Pitch 5, 10 and 20mm
- Control height up 480mm (pitch 5mm) and up 960mm (pitch10mm and 20mm)
- Maximum operating distance up to 3m (for 5mm pitch) and 6m (for 10mm and 20 pitch)
- Digital outputs NPN and PNP ; analogue current output (4...20mA) and analogue voltage output (0..10V), mix outputs : digital PNP and analogue voltage output (0..10V)
- Adjustment by teach-in , 2 levels of adjustment
- Blanking function . Available analogue versions TOP BEAM



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	0,3 ... 6m
Beams space	10mm
controlled height	640mm
minimum detectable object	Ø 10mm

number of rays	65
Sensitivity adjustment	Teach-in by wire
Application	
Function Principle	emitter/receiver
Outputs	
Output type	NPN + PNP
Output Function	NO/NC
Switching frequency	18,1Hz
Electrical data	
Operating Voltage	16,8... 30Vdc
No-Load supply current	\leq 330mA
Load current	< 100mA
Leakage current	\leq 10 μ A
Output voltage drop	< 1,5V @ 100mA
Max ripple content	< 1,2Vpp
LED indicators	Blue, red and yellow (emitter) - green, red and yellow (receiver)
Time delay before availability	< 3s
Short-circuit protection	Yes
Reverse Polarity Protection	Yes

Emission	Infrared (880nm)
Interference to external light	IEC EN 60947-5-2
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	20mm x 649mm x 35mm
Weight	1500g
Housing Material	Aluminium
Connections	M12 4pin + cable PVC 200mm ; M12 8pin + cable PVC 200mm
Active Head Material	PMMA
Operating temperature	-10°C...+ 55° C (without freeze)
Storage temperature	- 25°C...+ 60° C (without freeze)

Test/Approvals

Approvals	CE, cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	IEC EN 60947-5-2
Degree of protection	IP67

Accessories

Supplied Accessories	ST151 fixing kit
----------------------	------------------

Generical Data

Dimensions 649x36x20


Operating Temperature -10°C...+ 55° C (without freeze)

Mechanical Protection IP67


CONNECTIONS


Electrical diagram

CX2E0

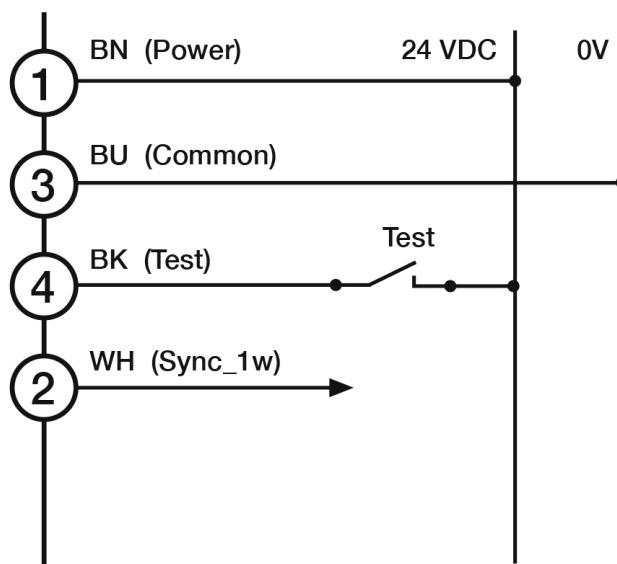

CX2RB

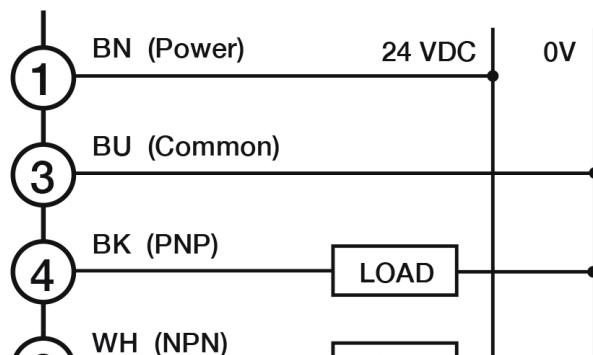

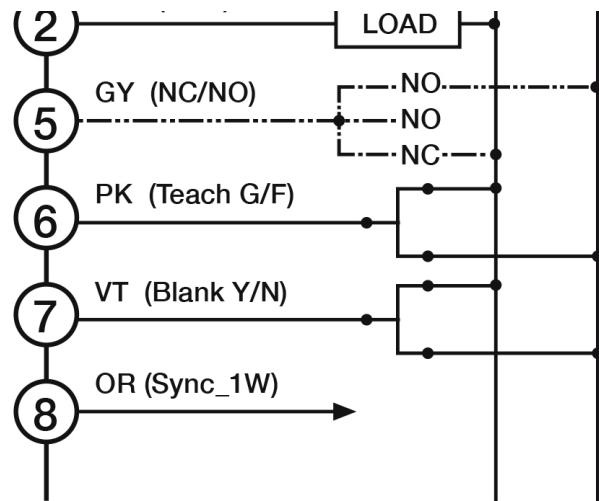

G coarse calibration **F** fine calibration

BK black **BU** blue



BN brown **GY** gray

RD red **WH** white

PK pink **VT** violet


OR orange

Connector

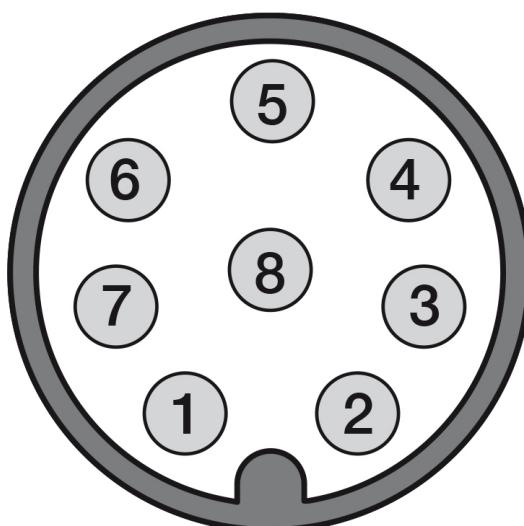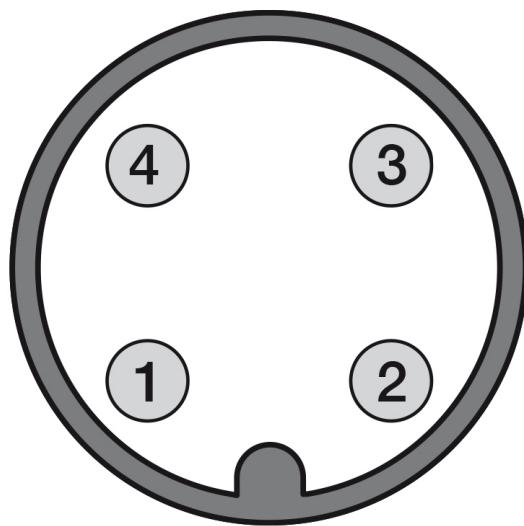

OTHERS

Dimensions



H (barrier height) = h (controlled height) + 9 mm

Datasensing

S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail

info@datasensing.com

**date of
printing**

20/01/2026

15:09:22