



FQ

FQIZ/BN-0A

Photo.M18,NPN-NO+NC,Cable,Receiver
M18 PHOTOELECTRIC SENSORS WITH SHORT BODY

OVERVIEW

- Wide range of models: direct diffuse, retro-reflective, polarized and fixed-focus
- Direct diffuse models with short and long sensing distance, polarized and through beam
- Nickel brass or plastic housing
- NO+NC complementary output
- P67 protection degree
- Complete protection against electrical damages
- Approvals: CE



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	20m
Thermal drift of Sr	$\leq 10\%$ Sr
Repeat Accuracy	5%
Sensitivity adjustment	No

Application

Function Principle	Receiver
Emitter/Receiver	Receiver
Optic position	Axial

Outputs

Output type	NPN NO+NC
Output Function	NO+NC
Switching frequency	250Hz
Response time	2ms

Electrical data

Operating Voltage	10...30VDC
No-Load supply current	≤ 25mA
Load current	≤50mA
Leakage current	≤10μA
Output voltage drop	≤2V@Iload=50mA
Max ripple content	≤10%
LED indicators	Yellow (status output)
Time delay before availability	≤200ms
Short-circuit protection	Short circuit (autoreset), Overvoltage

Reverse Polarity Protection	Polarity inversal, Impulsive voltage
Emission	
Interference to external light	5000lux (incandescent lamp), 10000lux (sunlight)

Mechanical data

Dimensions	M18 x 1/L=51,2mm
Housing material	PBT / PC cable exit
Weight	100g
Connections	2m PVC cable
Active Head Material	PC
Tightening torque	1Nm
Operating temperature	- 25°C...+ 70° C (Without freeze)
Diameter/Dimension	M18

Test/Approvals

Approvals	CE
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67

Accessories

Supplied Accessories	nuts M18 x 1
----------------------	--------------

Generical Data

Dimensions

M18 x 1/L=51,2mm

Operating Temperature


- 25°C...+ 70°C (Without freeze)

Mechanical Protection

IP67


CONNECTIONS

Eletrical diagram

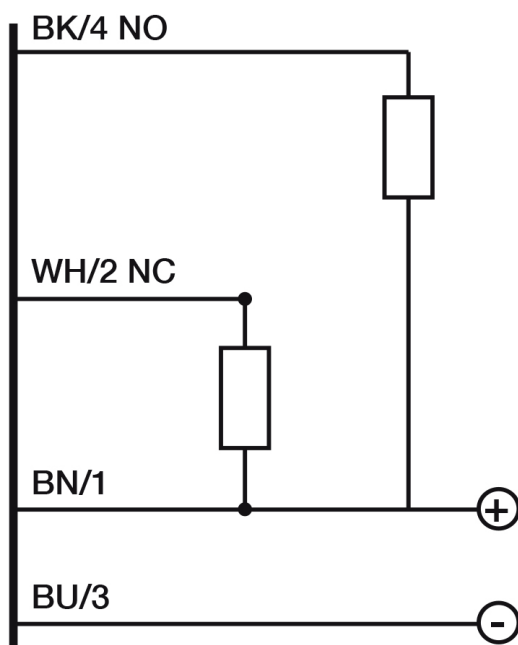

OTHERS

Dimensions

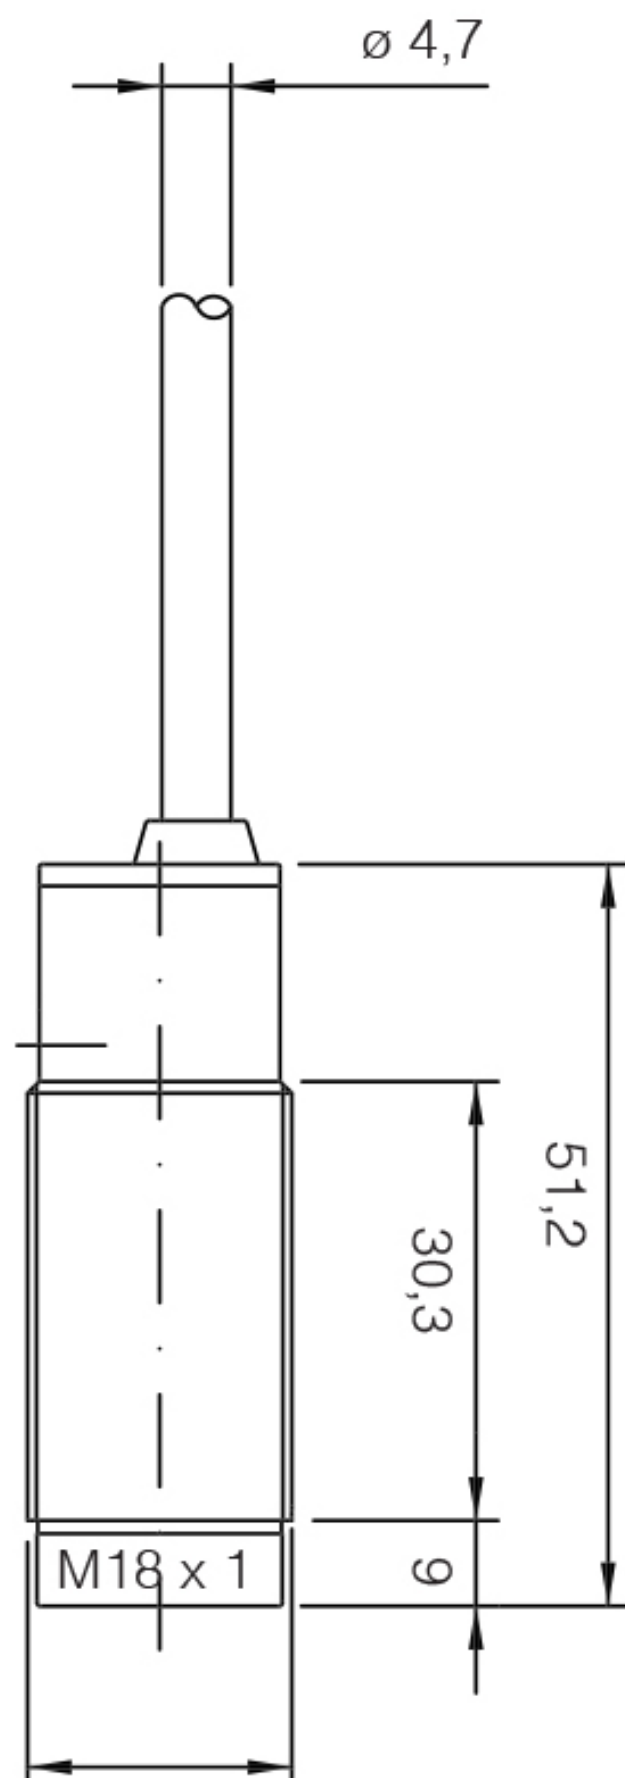

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
10/08/2026
01:24:32