



# MV-MQ

## MV2/C0-0A

Photo.M18,AC-NC,Cable,Diffuse

M18 AC MULTIVOLTAGE OUTPUT PHOTOELECTRIC SENSORS

## OVERVIEW

- Wide range of models: diffuse, retro-reflective, polarized, through-beam
- Through-beam models with high sensing range
- Retro-reflective models with polarized light (with visible beam)
- M12 plug cable exit in axial or right angle shape
- Low leakage current and high output current
- IP67 protection degree
- Complete protection against electrical damage



## TECHNICAL FEATURES

### Detection properties

Nominal sensing distance	100mm
Thermal drift of Sr	$\leq 10\%Sr$
Repeat Accuracy	5%
Sensitivity adjustment	No

### Application

Function Principle	Diffuse reflection (short distance, $\leq 200\text{mm}$ )
Notes	white target Kodak 90% 100 x 100mm
Optic position	Axial

#### Outputs

Output type	TRIAC NC
Output Function	NC
Switching frequency	25Hz
Response time	20ms

#### Electrical data

Operating Voltage	20...253VAC/50-60Hz
No-Load supply current	$\leq 30\text{mARMS}$
Load current	5...300mARMS
Leakage current	6A
Output voltage drop	$\leq 3\text{V}@I_{\text{load}}=300\text{mARMS}$
Max ripple content	$\leq 10\%$
LED indicators	Red (status output)
Time delay before availability	$\leq 200\text{ms}$
Emission	LED Infrared (880nm)

Interference to external light	3.000lux (incandescent lamp), 10.000lux (sunlight)
--------------------------------	--

#### Mechanical data

Dimensions	M18x1/L=78,9mm
------------	----------------

Weight	100g
--------	------

Housing Material	PBT / PC cable exit
------------------	---------------------

Connections	2m PVC cable
-------------	--------------

Active Head Material	PMMA
----------------------	------

Tightening torque	1Nm
-------------------	-----

Operating temperature	- 25°C...+ 70° C (without freeze)
-----------------------	-----------------------------------

Diameter/Dimension	M18
--------------------	-----

#### Test/Approvals

Approvals	CE cURus
-----------	----------

EMC compatibility	EN 60947-5-2
-------------------	--------------

Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
-----------------------	--

Degree of protection	IP67
----------------------	------

#### Accessories

Supplied Accessories	Nuts M18 x 1
----------------------	--------------

#### Generical Data

Dimensions	M18x1/L=78,9mm
------------	----------------

Operating Temperature


- 25°C...+ 70°C (Without freeze)

Mechanical Protection

IP67


## CONNECTIONS

Electrical diagram

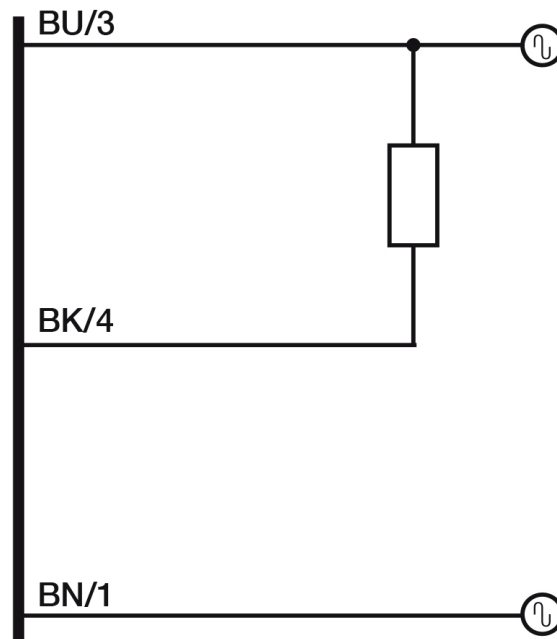


## OTHERS

Dimensions

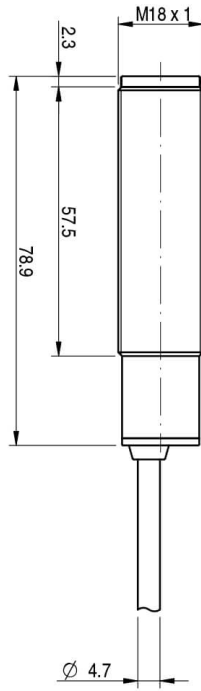

Response curves

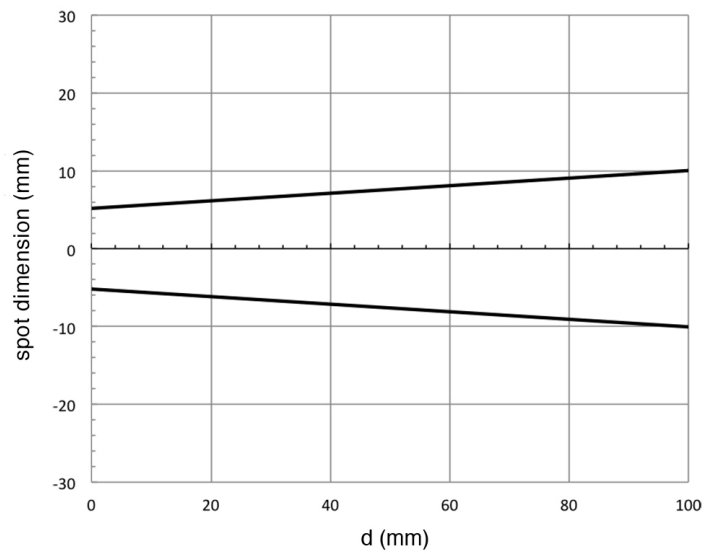

**Datasensing  
S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail  
info@datasensing.com

**date of  
printing**  
04/04/2026  
06:22:45