



S3N

95B010092

**S3N-PR-5-B01-PL RRX POL PNP LIGHT
M8**
MINIATURE PHOTOELECTRIC SENSOR

OVERVIEW

- All models with visible and bright red emission
- LED and Laser emission models
- Multiple Background suppression functions
- Shiny and clear object detection
- Single, Double trimmer & Push Button models
- Diffuse proximity up to 100 cm
- Background suppression up to 800 mm (LED trimmer version)
- Polarized RRX 7 m (Red LED emission)
- Polarized RRX 12 m (Red Laser emission)
- Through-beam 20 m and Laser 30 m
- Connection with 2 m Cable or M8 connector
- Rugged IP67 Plastic miniature case
- M3 threaded holes on the front side with metal inserts
- State of the art IO-Link connectivity with extended Smart Tasks



TECHNICAL FEATURES

Detection properties

Nominal sensing distance	7m
--------------------------	----

Sensitivity adjustment	1 turn trimmer
------------------------	----------------

Minimum sensing distance (blind zone)	0,05m
---------------------------------------	-------

Application

Function Principle	Polarized retroreflective
--------------------	---------------------------

Notes	On R5 reflector
-------	-----------------

Optic position	Radial 90°
----------------	------------

Functions	Polarized retroreflective
-----------	---------------------------

Outputs

Output type	PNP Lon
-------------	---------

Output Function	Lon
-----------------	-----

Switching frequency	1kHz
---------------------	------

Response time	500µs
---------------	-------

Electrical data

Operating Voltage	10...30VDC
-------------------	------------

No-Load supply current	≤ 35mA
------------------------	--------

Load current	≤100mA
--------------	--------

Leakage current	≤ 300 µA
-----------------	----------

Output voltage drop	≤2V@Iload=100mA
---------------------	-----------------

Max ripple content	≤10%
--------------------	------

LED indicators	yellow OUTPUT LED, green STABILITY LED
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	LED Red (635nm)
Interference to external light	according to EN 60947-5-2 : 2020
Impulsive Overvoltage Protection	Yes
Insulation resistance	>20 MΩ 500 Vdc, between electronics and housing
Contact resistance	500 Vac 1 min., between electronics and housing
0,1μF @Vmax - 1μF @Vmin	Yes

Mechanical data

Housing Material	Plastic Polymer Fiber Glass reinforced
Connections	M8 plug 4pin
Active Head Material	PMMA
Storage temperature	- 25°C...+70°C
Plug connector material	Metal
shaft material	POM, PMMA
Diameter/Dimension	Cubic

Test/Approvals

Approvals	CE cULus
-----------	----------

EMC compatibility	EN 60947-5-2
Shocks and vibrations	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
Generical Data	
Dimensions	11x31x19 mm
Operating Temperature	-25°C ... 55°C
Mechanical Protection	IP67


CONNECTIONS

Electrical diagram



OTHERS

Response curves

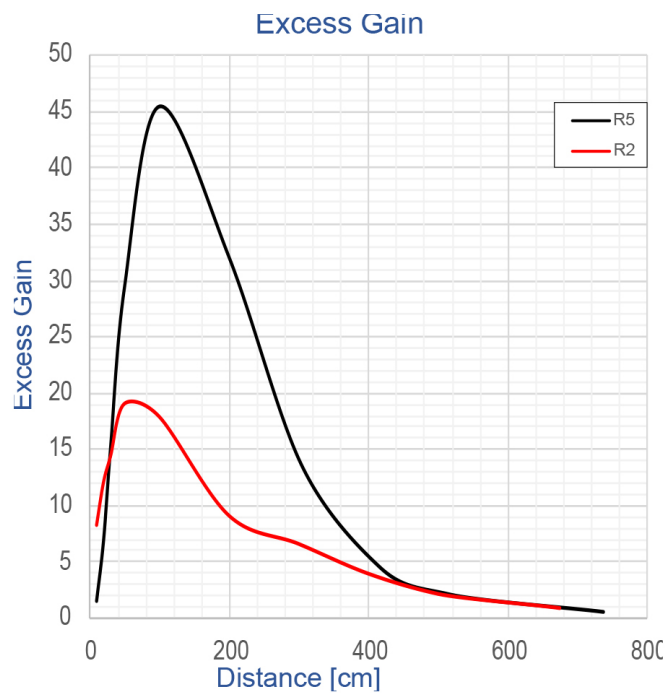

**Datasensing
S.r.l.**

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
05/04/2026
17:32:40