



CD

CV08/0B-00A

Connect.M8-M-Axial,4 p,Field attach.

TECHNICAL FEATURES

Application

Fixing	screw terminals
--------	-----------------

Electrical data

Rated current	a 40°C 4 A
---------------	------------

Led	no
-----	----

Wires	4
-------	---

Insulation resistance	$\geq 100 \text{ m}\Omega$
-----------------------	----------------------------

Contact resistance	$\leq 5 \text{ m}\Omega$
--------------------	--------------------------

Rated voltage	60 V (3 plugs) 30 V (4 plugs)
---------------	-------------------------------

Mechanical data

Connections	Field attachable
-------------	------------------

Tightening torque	0,2 Nm (M8 nut)
-------------------	-----------------

Operating temperature	-40 °C ... 85 °C
-----------------------	------------------

Head type	Axial
Plug	M8
Outer diameter	3,5 mm ... 5 mm
Stripping lenght of the sheath	12 mm
Conductors section	0,14 mm²...0,5 mm²
Model	Male


Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-40 °C ... 85 °C
Mechanical Protection	IP67

OTHERS

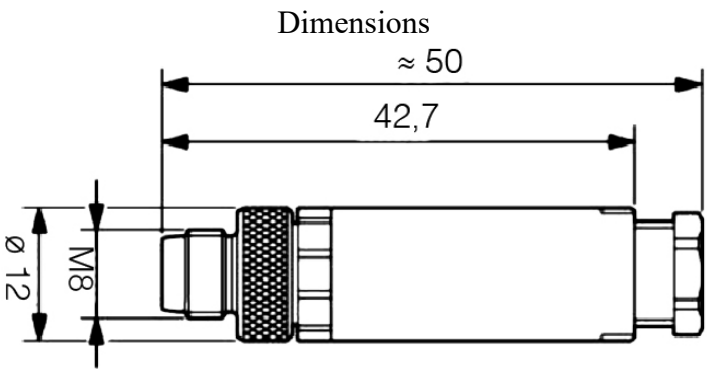

S.r.l.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail

info@datasensing.com

printing

10/08/2026

01:21:44